



ASM 340

Best in class leak detector for high reliability testing
in various applications, using helium and hydrogen



PFEIFFER  VACUUM

 伯東
Hakuto

ASM 340

Best in class leak detector for high reliability testing in various applications, using helium and hydrogen

Top performance

The ASM 340 guarantees top performance in vacuum or sniffing leak detection for various applications – from maintenance to applications in small production environments. This dependable leak detector can be used both for qualitative localization of leaks as well as quantitative global or local testing.

The ASM 340 is characterized by its powerful pumping system and available in conventional or dry versions. It is the only leak detector in its class that offers qualitative leak detection starting at 100 hPa before reaching the inlet test pressure. With an unrivaled performance in sniffing* the ASM 340 is the ideal partner for leak localization on pressurized parts. Easy operation, ultra fast response time and short recovery time are among the outstanding features of this compact multi-purpose unit. The ASM 340 is the perfect solution for everyday testing even in severe test conditions.

* $5 \cdot 10^{-10}$ Pa m³/s min.
detectable leak rate for He

Easy operation

The detachable control panel with magnets enhances ergonomics for leak detection on medium or large size parts. Its large, bright and color touch screen makes for a maximum readability of the leak test results. The menu is customizable and can be protected to avoid any unintended operation. Thanks to the wireless remote control, the ASM 340 can easily be operated from a distance of up to 100 m.

For customized applications

As an extension range, the ASM 340 exists also without a backing pump. This ASM 340 I allows to connect a different backing pump, for even more convenience and/or better adaptation to customer application, as for example in case of integration into a leak detection system. The connection for the external backing pump is located at the rear of the leak detector.



Remote control RC 500 WL



ASM 340 I



Analytics



Industry



Research & Development



Coating


More convenience

- Sniffer probe with LEDs that indicate the measurement status and with a zero button facilitates sniffing leak detection
- Bypass option for the installation of an auxiliary primary pump
- Complete range of I/O and Profibus communication available for an easy integration into production lines



Sniffer probe LP 505

Dimensions

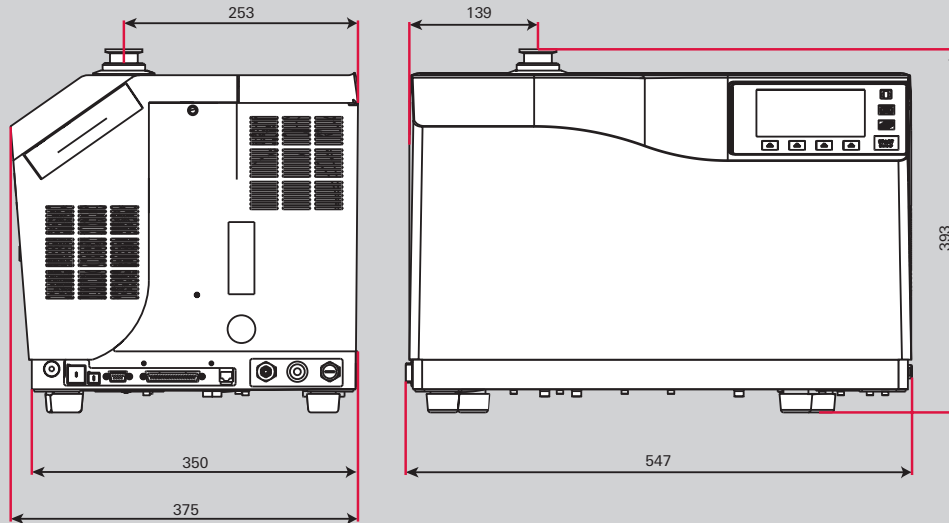

Dimensions in mm

Technical data

| General technical data | ASM 340 |
|---|---|
| Flange (in) | DN 25 ISO-KF |
| Test method | Vacuum and sniffing leak detection |
| Detectable gases | ^4He , ^3He , H_2 |
| Minimum detectable leak rate for He (sniffing leak detection) | $5 \cdot 10^{-10} \text{ Pa m}^3/\text{s}$ |
| Minimum detectable leak rate for He (vacuum leak detection) | $< 5 \cdot 10^{-13} \text{ Pa m}^3/\text{s}$ |
| Pumping speed for He | 2.5 l/s |
| Maximum inlet test pressure | 25 hPa |
| Start-up time (20°C) without calibration | ~ 3 min |
| I/O interfaces | Digital and Analog I/O, Relays |
| Interfaces (see ordering matrix) | RS-232, Ethernet, Bluetooth ... |
| Selectable languages | English, French, German, Italian, Spanish, Russian, Japanese, Chinese, Korean |
| Dimensions | 393 x 547 x 375 mm |

| Specific technical data | ASM 340 | ASM 340 D (dry version) | ASM 340 I |
|-------------------------|---|------------------------------|-----------|
| Backing pump | Rotary vane pump | Diaphragm pump | None |
| Backing pump capacity | 15 m ³ /h | 3.4 m ³ /h | – |
| Power consumption max. | 850 W | 600 W | 350 W |
| Supply | 90–130 V; 50/60 Hz 200–240 V; 50/60 Hz | Universal 90–240 V; 50/60 Hz | Universal |
| Weight | 56 kg | 45 kg | 32 kg |
| Operating temperature | 0–45°C (vacuum) 0–40°C (sniffing) | 0–35°C | 0–40°C |

**Order number matrix
ASM 340**


Order number
abc A 0 0 A d M e 9 f

| Leak detector | XXX |
|----------------------------------|------------|
| ASM 340 | JSV |
| ASM 340 D (dry version) | KSB |
| ASM 340 I (without backing pump) | MSX |

| Interface board | d |
|-------------------------------|----------|
| Basic 15 Pins I/O | 0 |
| Basic 15 Pins I/O + Bluetooth | 1 |
| 37 Pins I/O | 2 |
| 37 Pins I/O + Wifi | 3 |
| 37 Pins I/O + Ethernet | 4 |
| 37 Pins I/O + Bluetooth | 5 |

| Supply | e |
|--|----------|
| 90–130 V, 50/60 Hz, US Power cable (only for ASM 340) | L |
| 200–240 V, 50/60 Hz, EU Power cable (only for ASM 340) | H |
| Universal 90–240 V, 50/60 Hz (only for ASM 340 D + I) | M |

| Personalization | f |
|---|----------|
| No | A |
| Japan (not available for ASM 340 D and ASM 340 I) | B |



Order number accessories

| Accessories | Order number |
|---|---------------------|
| Country-specific power cable | |
| UK | 104411 |
| Italy | 104758 |
| Switzerland | 103718 |
| Remote control, 5 m cable | |
| Leak rate in mbar l/s, front panel in English | 106688 |
| Leak rate in Pa m ³ /s, front panel in English | 108880 |
| Wireless remote control | |
| RC 500 WL | PT 445 432-T |
| Transport cart | |
| Transport cart, 2 wheels, for ASM 340 and ASM 340 D (not for ASM 340 I) | 122570 |
| Spray Gun | |
| Standard | 112535 |
| “Elite kit” spray gun with accessories in a compact case | 109951 |
| Standard sniffer probe | |
| 5 m hose length, rigid 9 cm nozzle | SNC1E1T1 |
| Other nozzle and hose lengths upon request | |
| Sniffer probe with Pass/Fail indication and Zero button | |
| LP 505, 5 m hose length, rigid 12 cm nozzle | BG 449 208-T |
| Bypass option | |
| With European cable | PT 445 411-T |
| With US cable | PT 445 413-T |
| Interface | |
| Profibus | 122253 |



Customer benefits

- Fastest time to test in its class
- High backing pump capacity for versatile use
- Rapid response time due to high helium pumping speed
- Unique capability to detect leaks starting at 100 hPa
- Impressive results in sniffing test mode, with $5 \cdot 10^{-10}$ Pa m³/s minimum detectable leak rate for helium
- Low maintenance due to rugged design
- Integrated SD memory card for recording, downloading and parameter setting
- Detachable color control panel for enhanced ergonomics
- User friendly and customizable interface
- Complete range of I/O and Profibus communication available

上海伯东--您理想的真空合作伙伴!

伯东公司成立于1953年，全球范围内有一千七百名员工。伯东企业(上海)有限公司(www.hakuto-vacuum.cn)主要从事半导体设备、电子零部件加工、销售及相关服务工作，集团年营业额约为100亿人民币。伯东公司在国内主要城市：北京、苏州、广州、深圳、成都及厦门设有营业据点。

上海伯东真空产品事业部秉承为广大中国客户提供世界一流的真空产品、推动中国真空工艺发展、承担企业社会责任为经营理念，已累计为超过10,000家企业提供真空服务，覆盖工业、半导体、镀膜、科研和分析行业。

上海伯东代理品牌包含：德国Pfeiffer全系列真空产品、美国KRI离子源、美国Brooks Polycold制冷机，美国HVA真空阀门，美国inTEST(Temptronic)高速温度循环测试机，离子蚀刻机，真空镀膜系统及配套真空零配件等。

上海伯东作为国际知名真空品牌指定授权代理商，全权负责在中国地区的销售和维修服务，100%使用原厂进口零部件以及国外受训维修工程师；拥有完全的拆解，维修，校正能力并提供24小时在线服务。



Are you looking for a
perfect vacuum solution?
Please contact us:

伯东企业(上海)有限公司
T +021 5046-3511
ec@hakuto-vacuum.cn



www.hakuto-vacuum.cn
www.hakuto-vacuum.com.tw

PFEIFFER  VACUUM

 伯東

