


F-140-HV

BULK CURRENT INJECTION

The F-140-HV is used for BCI testing in accordance with DO-160, section 20, as well as Pulse Inductive Damped Sinusoid testing in accordance with DO-160, section 22.

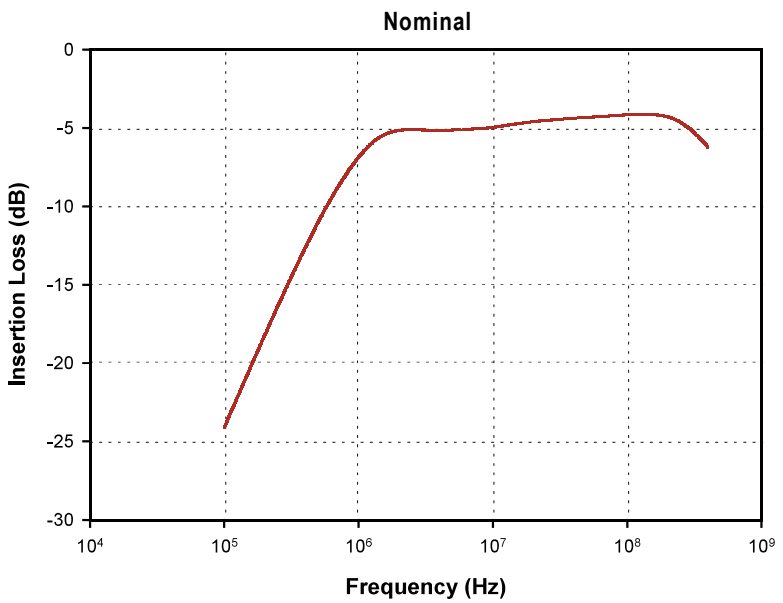

Specifications

- Frequency: 100 kHz – 400 MHz
- Inner Diameter: 40 mm
- Outer Diameter: 127 mm
- Height: 70 mm
- Peak Pulse Rating: 5 kV
- RF Connector: HN Female
- Secondary Power Current Rating: DC - 400 Hz
 - Differential Mode - Single Conductor: 100 Amps
 - Common Mode - Total Cable Bundle: 500 Amps

Accessories

- FCC-BCICF-1-HV • Calibration Fixture
- Bandwidth: 10 kHz – 400 MHz

Specifications subject to change without notice



Fischer Custom Communications, Inc.

19220 Normandie Ave., Unit B Torrance, CA 90502
Phone: 310-303-3300
Email: sales@fischercc.com

© Fischer Custom Communications, Inc.