


# F-120-8F

## BULK CURRENT INJECTION

The F-120-8F has been designed to extend the use of conducted immunity testing over the bandwidth of 10 kHz – 400 MHz.

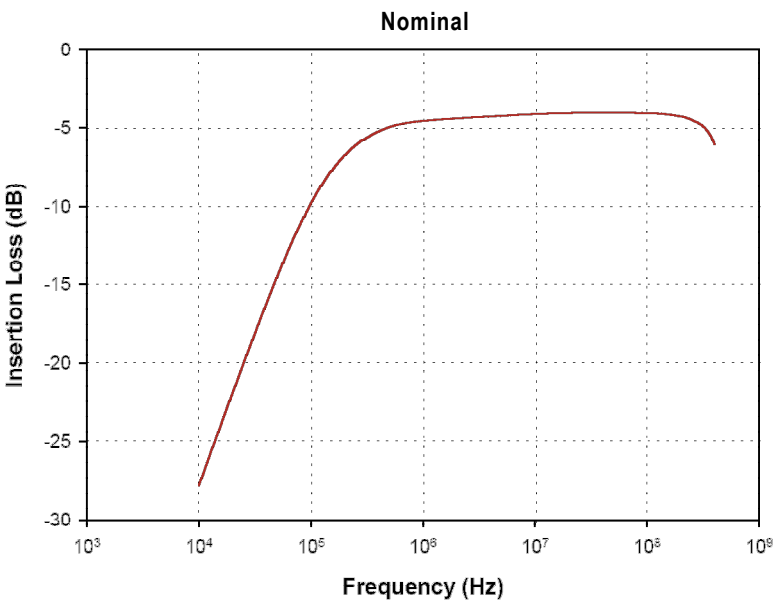

### Specifications

- Frequency: 10 kHz – 400 MHz
- Inner Diameter: 40 mm
- Outer Diameter: 127 mm
- Height: 134 mm
- Input Power rating: 200 watts (30 min)
- Secondary Power Current Rating: DC - 400 Hz
  - Differential Mode - Single Conductor: 100 Amps
  - Common Mode - Total Cable Bundle: 500 Amps

### Accessories

- Calibration Fixture
  - FCC-BCICF-4 (ISO 11452-4)
  - F-170421-1008-1 (DO-160, Mil Std 461)

*Specifications subject to change without notice*



Fischer Custom Communications, Inc.

19220 Normandie Ave., Unit B Torrance, CA 90502  
Phone: 310-303-3300  
Email: sales@fischercc.com