
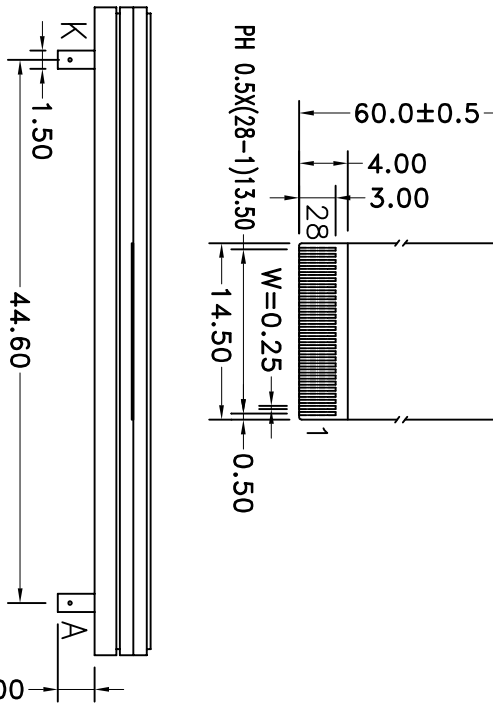
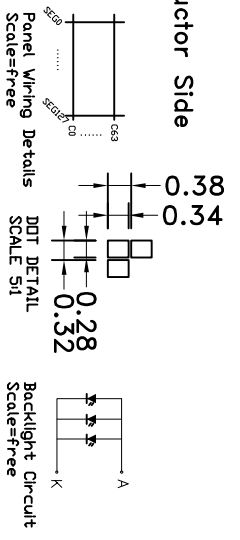


PIN	SYMBOL	PIN	SYMBOL
1	CS1	15	VOUT
2	RES	16	CAP3P
3	A0	17	CAP1N
4	WR	18	CAP1P
5	RD	19	CAP2P
6	D0	20	CAP2N
7	D1	21	V4
8	D2	22	V3
9	D3	23	V2
10	D4	24	V1
11	D5	25	V0
12	D6	26	CB6
13	D7	27	P/S
14	VSS	28	VDD

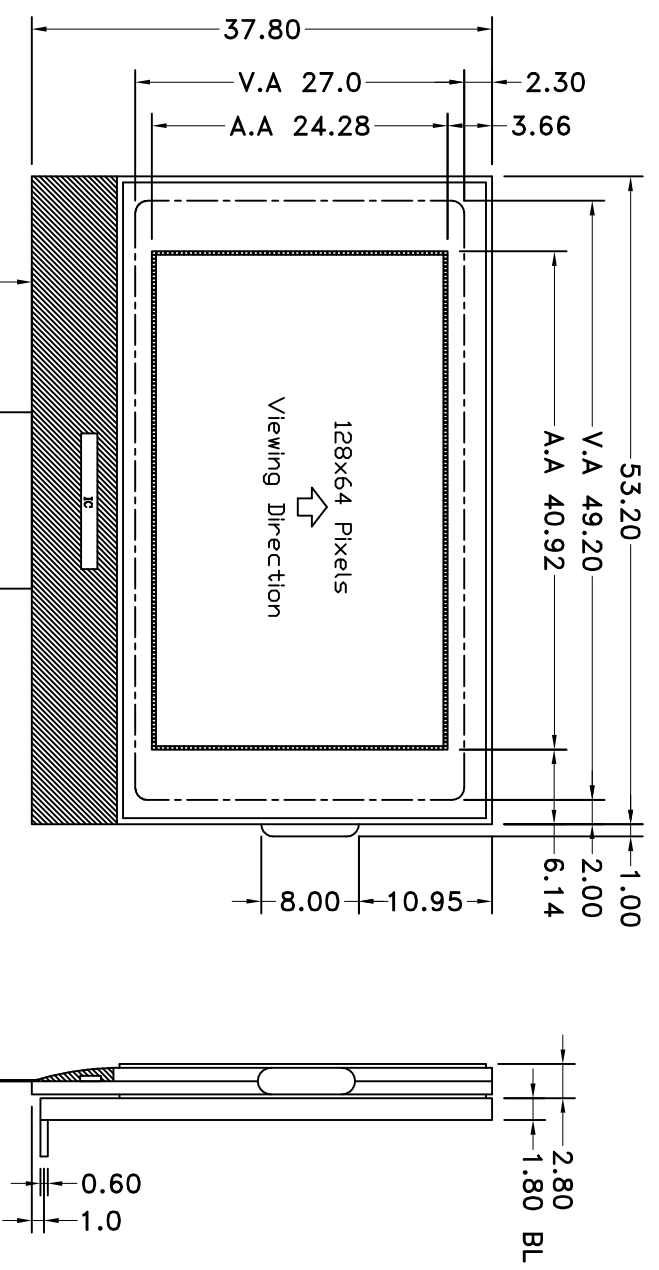

D	
*1. LCD Display Type	STN-Blue, Transmissive, Negative
*2. Viewing Direction	6H
*3. LCD Driver Mode	1/64Duty, 1/9Bias
*4. Operating Voltage	3.3V
*5. Operating Temp	-20°C~70°C
*6. Storage Temp	-30°C~80°C
*7. Driver IC	ST7565
*8. Backlight	WHITE Vf=31V If=45mA
*9. ROHS	

HOT DISPLAY

Dwg Title		HTG12864-20-25W-28C05-V06	
Dwg No		10200155	
Scale	Unit	Tol.	Veri
	mm	±0.3	A/0
Drawn	Checked	Date	
LIWEI		2014-08-01	