


挂勾式内轴承式电磁离合器带铝座 (适合轴对轴安装) CE10S6AA/CE11S5AA/CE12S5AA/CE1005AA/CE1010AA
 电磁离合器、卷扬机电磁离合器、打包机电磁离合器 CD-E1-0.6/CD-E1-1.5/CD-E1-2.5/CD-E1-5/CD-E1-10/CD-E1-20
 新型号 CDE0S6AI/CDE1S5AF/CDE2S5AD/CDE005AB/CDE010AB/CDE010AC/CDE020AF/CDE020AE/CDE040AC
 仟岱总代理 13710967244 余彦泽 <http://www.chaintail.com.cn>

CE1 Series

内轴承式电磁离合器
 Electromagnetic Bearing - Mounted Clutch

附底座 with hub

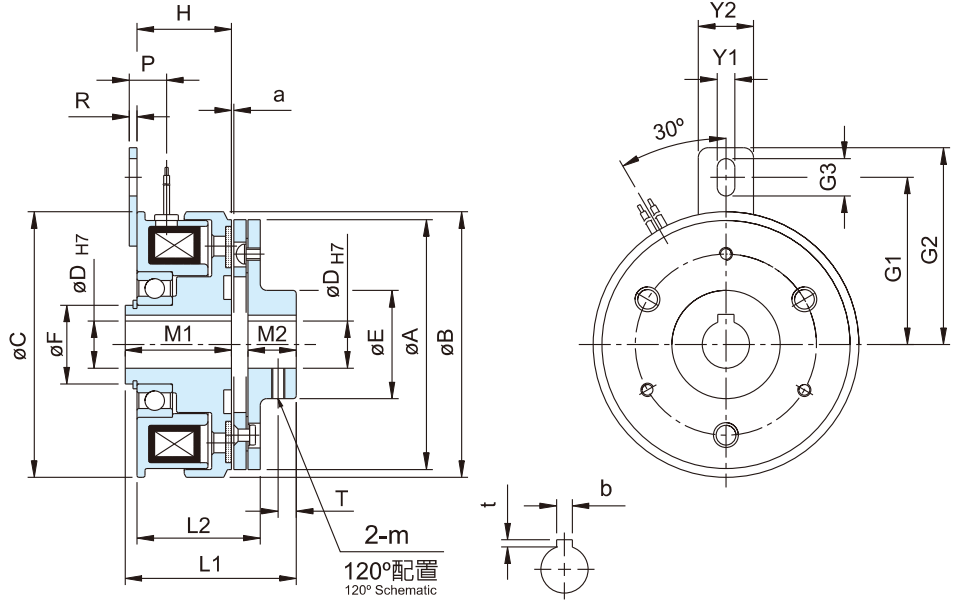

型號 MODEL	CE10S6AA	CE11S5AA	CE12S5AA	CE1005AA	CE1010AA
靜摩擦轉距 [kgm](Nm) Static Friction Torque	0.55(5.5)	1.1(11)	2.2(22)	4.5(45)	9(90)
動摩擦轉距 [kgm](Nm) Dynamic Friction Torque	0.5(5.0)	1.0(10)	2.0(20)	4(40)	8(80)
功率 Power [24V](W) at 20°C	11	15	20	25	35
徑方向 Radius	A	63	80	100	160
	B	67.5	85	106	169
	C	67.5	85	106	133
	D	12	15	20	25
	E	27.5	31	41	49
	F	20	25	30	40
	H	24	27	30	33.5
	L1	46.2	54.2	64.9	75
	L2	32.2	35.6	40.9	46.8
	M1	27.1	29.5	34	37.7
	M2	9.5	20	25	30
	P	7.5	11.5	11.6	11.6
	R	2	2	2	2
	T	6	8	10	12
a	0.2 (±0.05)			0.3 (^{+0.05} / _{-0.1})	
軸方向 Shaft	G1	42.75	55.3	61.75	76.3
	G2	49.5	63.5	72.5	85
	G3	9.5	10.5	11.5	11.4
	Y1	4.5	5.5	6.5	6.4
	Y2	12	14	16	16
	b	4	5	5	7
	t	1.8	2.3	2.3	3.3
	m	M4*0.7P	M5*0.8P		M6*1P
重量 Weight (kg)	0.54	0.95	1.73	3.18	5.6
保護素子 Protective device	470KD07	GD80KD10		GD80KD14	